



150 - 950 Nm

MAX SPEED 30 RPM

LIGHTWEIGHT FRL UNIT (2 KG)

FAST AND LIGHT

DOUBLE SAFETY TRIGGER
OPTION

SPECIFICATIONS

- **TORQUE RANGE:** 150 - 950 Nm.
- **SPEED:** 30 RPM.
- **WEIGHT:** 3,4 Kg, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** ¾ inch square drive.
- **NOISE LEVEL:** 80 dB.
- **REPEATABILITY ON SAME JOINT*:** +/- 2%.

* -Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard



PN: 13366

Deep socket



PN: 13367

Double ended



PN: 13368

Blank



PN: 13364

Double ended blank




PN: 13365

Safety sliding



PN: 25243

DIMENSIONS IN MM

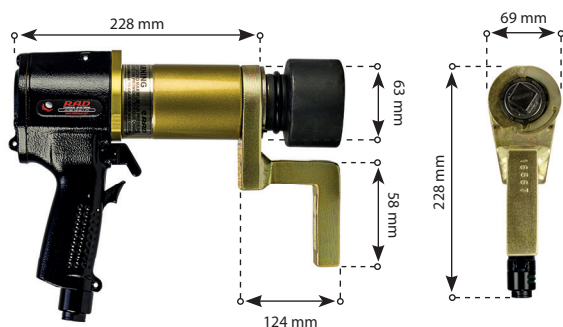

TOOL KIT INCLUDING

- 10 GX
- Standard reaction arm (PN: 13366)
- Retaining ring (PN: 12733)
- Lightweight FRL unit (2 Kg)
- 3.6 meter hose
- Airmotor oil for the FRL unit
- User manual
- Calibration certificate
- Safety instruction on USB stick



ACCESSOIRES

Product	Part number
Double safety trigger (option)	200144
Swivelling tool handle (option)	On request
Tool hanger (option)	On request
Peli cube case (option)	200317
EX certification (option)	200850

