



275 - 1.350 Nm

MAX SPEED 20 RPM

LIGHTWEIGHT FRL UNIT (2 KG)

FAST AND LIGHT

DOUBLE SAFETY TRIGGER
OPTION

SPECIFICATIONS

- TORQUE RANGE:** 275 - 1.350 Nm.
- SPEED:** 20 RPM.
- WEIGHT:** 3,6 Kg, excluding reaction arm and impact socket.
- SQUARE DRIVE:** ¾ inch square drive.
- NOISE LEVEL:** 80 dB.
- REPEATABILITY ON SAME JOINT*:** +/- 2%.

* -Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard



PN: 13366

Deep socket



PN: 13367

Double ended



PN: 13368

Blank



PN: 13364

Double ended blank




PN: 13365

Safety sliding



PN: 25243

DIMENSIONS IN MM

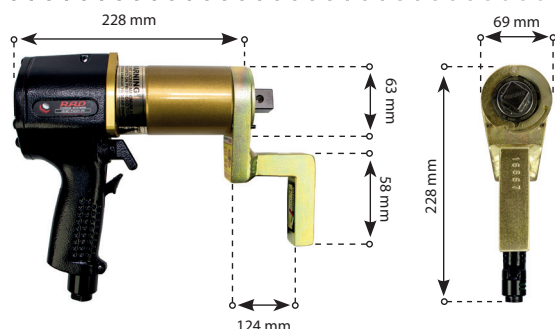

TOOL KIT INCLUDING

- 14 GX
- Standard reaction arm (PN: 13366)
- Retaining ring (PN: 12733)
- Lightweight FRL unit (2 Kg)
- 3.6 meter hose
- Airmotor oil for the FRL unit
- User manual
- Calibration certificate
- Safety instruction on USB stick



ACCESSOIRES

Product	Part number
Double safety trigger (option)	200142
Peli cube case (option)	200317
EX certification (option)	200850

