



50 - 275 Nm

MAX SPEED 90 RPM

LIGHTWEIGHT FRL UNIT (2 KG)

FAST AND LIGHT

DOUBLE SAFETY TRIGGER

OPTION

SPECIFICATIONS


- **TORQUE RANGE:** 50 - 275 Nm.
- **SPEED:** 90 RPM.
- **WEIGHT:** 2,2 Kg, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** 3/4 inch square drive.
- **NOISE LEVEL:** 80 dB.
- **REPEATABILITY ON SAME JOINT*:** +/- 2%.

* -Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

| Standard | Deep socket | Double ended |
|-----------|--------------------|----------------|
| | | |
| PN: 10686 | PN: 10687 | PN: 10688 |
| Blank | Double ended blank | Safety sliding |
| | | |
| PN: 10036 | PN: 10037 | On request |

DIMENSIONS IN MM

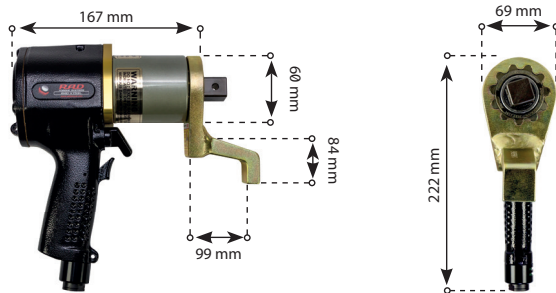

TOOL KIT INCLUDING

- 275 SL
- Standard reaction arm (PN: 21482)
- Retaining ring (PN: 10306)
- Lightweight FRL unit (2 Kg)
- 3.6 meter hose
- Airmotor oil for the FRL unit
- User manual
- Calibration certificate
- Safety instruction on USB stick



ACCESSOIRES

| Product | Part number |
|--------------------------------|-------------|
| Double safety trigger (option) | 200142 |
| Peli cube case (option) | 200317 |
| EX certification (option) | 200850 |

