



35 - 100 Nm

MAX SPEED 275 RPM

LIGHTWEIGHT FRL UNIT (2 KG)

FAST AND LIGHT

DOUBLE SAFETY TRIGGER

OPTION

SPECIFICATIONS


- **TORQUE RANGE:** 35 - 100 Nm.
- **SPEED:** 275 RPM.
- **WEIGHT:** 2,1 Kg, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** 3/4 or 1/2 inch square drive.
- **NOISE LEVEL:** 80 dB.
- **REPEATABILITY ON SAME JOINT*:** +/- 2%.

* -Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
PN: 10686	PN: 10687	PN: 10688
Blank	Double ended blank	Safety sliding
PN: 10036	PN: 10037	On request

DIMENSIONS IN MM

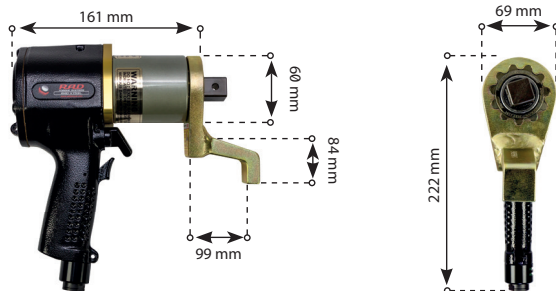

TOOL KIT INCLUDING

- 100 SL
- Standard reaction arm (PN: 21482)
- Retaining ring (PN: 10306)
- Lightweight FRL unit (2 Kg)
- 3.6 meter hose
- Airmotor oil for the FRL unit
- User manual
- Calibration certificate
- Safety instruction on USB stick



ACCESSOIRES

Product	Part number
Double safety trigger (option)	200142
Peli cube case (option)	200317
EX certification (option)	200850

