



2.700 - 8.000 Nm

MAX SPEED 7 RPM

LIGHTWEIGHT FRL UNIT (2 KG)

HIGH POWER / WEIGHT RATIO

DOUBLE SAFETY TRIGGER
OPTION

SPECIFICATIONS

- TORQUE RANGE:** 2.700 - 8.000 Nm.
- SPEED:** 7 RPM.
- WEIGHT:** 12,5 Kg, excluding reaction arm and impact socket.
- SQUARE DRIVE:** 1,5 inch square drive.
- NOISE LEVEL:** 85 dB.
- REPEATABILITY ON SAME JOINT*:** +/- 2%.

* -Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard



PN: 15840

Deep socket



PN: 15788

Double ended



PN: 15790

Blank



PN: 15373

Double ended blank




PN: 15789

Safety sliding



On request

DIMENSIONS IN MM

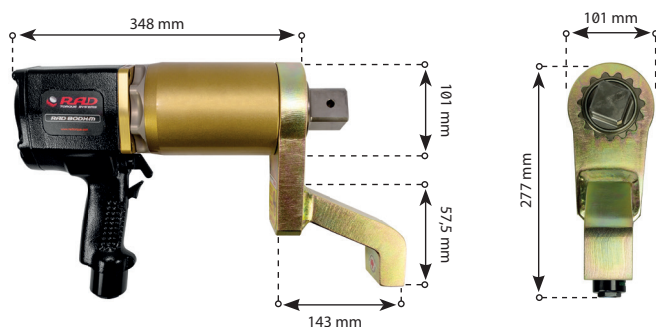

TOOL KIT INCLUDING

- 80 DX
- Standard reaction arm (PN: 15840)
- Retaining ring (PN: 15367)
- Lightweight FRL unit (2 Kg)
- 3.6 meter hose
- Airmotor oil for the FRL unit
- User manual
- Calibration certificate
- Safety instruction on USB stick



ACCESSOIRES

Product	Part number
Double safety trigger (option)	200144
Swivelling tool handle (option)	15956
Tool hanger (option)	12729
Peli cube case (option)	200317
EX certification (option)	200850

