



**400 - 2.000 Nm**

**MAX SPEED 9 RPM**

**LIGHTWEIGHT FRL UNIT (2 KG)**

**HIGH POWER / WEIGHT RATIO**

**DOUBLE SAFETY TRIGGER**

**OPTION**

## SPECIFICATIONS


- **TORQUE RANGE:** 400 - 2.000 Nm.
- **SPEED:** 9 RPM.
- **WEIGHT:** 3,9 Kg, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** 1 inch square drive.
- **NOISE LEVEL:** 80 dB.
- **REPEATABILITY ON SAME JOINT\*:** +/- 2%.

\* -Test results from RAD's certified calibration lab

## SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
PN: 14213	PN: 18480	PN: 19094
Blank	Double ended blank	Safety sliding
PN: 17888	PN: 19093	PN: 25242

## DIMENSIONS IN MM

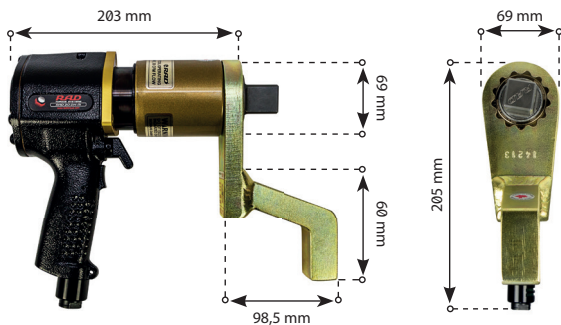

## TOOL KIT INCLUDING

- 20 DX
- Standard reaction arm (PN: 14213)
- Retaining ring (PN: 17367)
- Lightweight FRL unit (2 Kg)
- 3.6 meter hose
- Airmotor oil for the FRL unit
- User manual
- Calibration certificate
- Safety instruction on USB stick



## ACCESSOIRES

Product	Part number
Double safety trigger (option)	200144
Swivelling tool handle (option)	On request
Tool hanger (option)	On request
Peli cube case (option)	200317
EX certification (option)	200850

