



700 - 2.000 Nm

MAX SPEED 50 RPM

LIGHTWEIGHT FRL UNIT (2 KG)

HIGH POWER / WEIGHT RATIO

DOUBLE SAFETY TRIGGER
OPTION

SPECIFICATIONS


- TORQUE RANGE:** 700 - 2.000 Nm.
- SPEED:** 50 RPM.
- WEIGHT:** 4,8 Kg, excluding reaction arm and impact socket.
- SQUARE DRIVE:** 1 inch square drive.
- NOISE LEVEL:** 80 dB.
- REPEATABILITY ON SAME JOINT*:** +/- 2%.

* -Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 14213	PN: 18480	PN: 19094
Blank	Double ended blank	Safety sliding
		
PN: 17888	PN: 19093	PN: 25242

DIMENSIONS IN MM

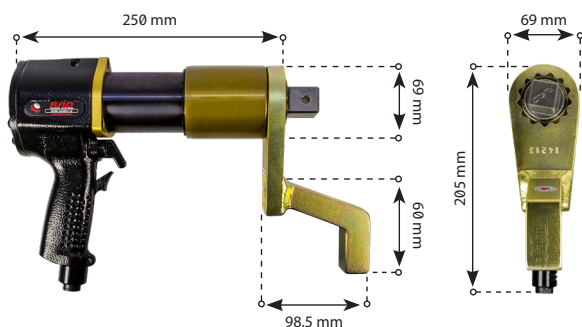

TOOL KIT INCLUDING

- 20 DX-2
- Standard reaction arm (PN: 14213)
- Retaining ring (PN: 17367)
- Lightweight FRL unit (2 Kg)
- 3.6 meter hose
- Airmotor oil for the FRL unit
- User manual
- Calibration certificate
- Safety instruction on USB stick



ACCESSOIRES

Product	Part number
Double safety trigger (option)	200144
Swivelling tool handle (option)	On request
Tool hanger (option)	On request
Peli cube case (option)	200317
EX certification (option)	200850

