



140 - 1.400 Nm

MAX SPEED 11 RPM

MAINTENANCE COUNTER

DIGITAL TORQUE SETTING

TORQUE + ANGLE FUNCTION

TORQUE CHECK FUNCTION

OPTION

SPECIFICATIONS

- **TORQUE RANGE:** 140 - 1.400 Nm.
- **SPEED:** 11 RPM.
- **WEIGHT:** 4,9 Kg, excluding reaction arm and socket.
- **SQUARE DRIVE:** ¾ inch square drive.
- **NOISE LEVEL:** Maximum 80 dB.
- **TORQUE SETTING:** 1 Nm incremental or 200 torque settings.
- **PRESETS:** 8 programmable presets.
- **INTELLIGENT COUNTER:** maintenance counter.
- **REPEATABILITY ON SAME JOINT*:** +/- 3,5%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard



PN: 13366

Deep socket



PN: 13367

Double ended



PN: 13368

Blank



PN: 13364

Double ended blank




PN: 13365

Safety sliding



PN: 25243

DIMENSIONS IN MM

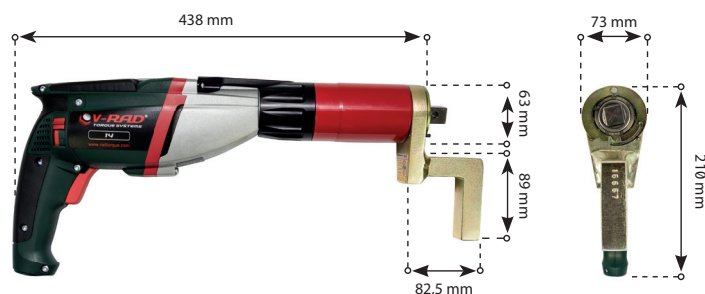

TOOL KIT INCLUDING

- MV-RAD 14
- Standard reaction arm (PN: 13366)
- Retaining ring (PN: 12733)
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
Swivelling tool handle (option)	15956
Tool hanger (option)	12729
120V version (option)	17303



Non
Impacting



Safe &
Reliable



Torque + angle
function



According to
European standards



Accredited
ISO/IEC 17025