



700 - 7.000 Nm

MAX SPEED 2 RPM

MAINTENANCE COUNTER

DIGITAL TORQUE SETTING

TORQUE + ANGLE FUNCTION

TORQUE CHECK FUNCTION

OPTION

SPECIFICATIONS


- **TORQUE RANGE:** 700 - 7.000 Nm.
- **SPEED:** 2 RPM.
- **WEIGHT:** 9,5 Kg, excluding reaction arm and socket.
- **SQUARE DRIVE:** 1,5 inch square drive.
- **NOISE LEVEL:** maximum 80 dB.
- **TORQUE SETTING:** 1 Nm incremental or 200 torque settings.
- **PRESETS:** 8 programmable presets.
- **INTELLIGENT COUNTER:** maintenance counter.
- **REPEATABILITY ON SAME JOINT*:** +/- 3,5%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 25286	PN: 26118	PN: 26119
Blank	Double ended blank	Safety sliding
		
PN: 26120	PN: 26121	On request

DIMENSIONS IN MM

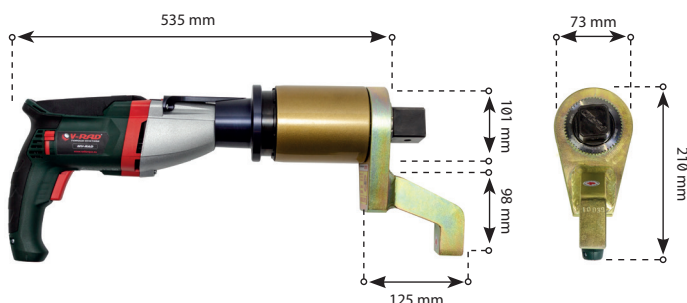

TOOL KIT INCLUDING

- MV-RAD 70
- Standard reaction arm (PN: 25286)
- Retaining ring (PN: 21455)
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
Tool hanger (option)	22637
120V version (option)	17303
Swivelling tool handle (option)	26674

