



**675 - 4.500 Nm**

**MAX SPEED 8 RPM**

**SERVO CONTROLLED**

**DATA LOGGING**

**TORQUE + ANGLE FUNCTION**

**SMART SOCKET CONNECTIVITY**

## SPECIFICATIONS


- **TORQUE RANGE:** 675 - 4.050 Nm.
- **SPEED:** 8 RPM.
- **WEIGHT:** 10,6 Kg, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** 1,5 inch square drive.
- **NOISE LEVEL:** Maximum 75 dB.
- **PASSWORD PROTECTION:** Three user levels.
- **LED INDICATOR LIGHTS:** Pass/Fail.
- **CUSTOM PROGRAMMABLE**
- **REPEATABILITY ON SAME JOINT\*:** +/- 2%.

\* Test results from RAD's certified calibration lab

## SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
PN: 17748	PN: 11534	PN: 11533
Blank	Double ended blank	Safety sliding
PN: 11530	PN: 11532	On request

## DIMENSIONS IN MM

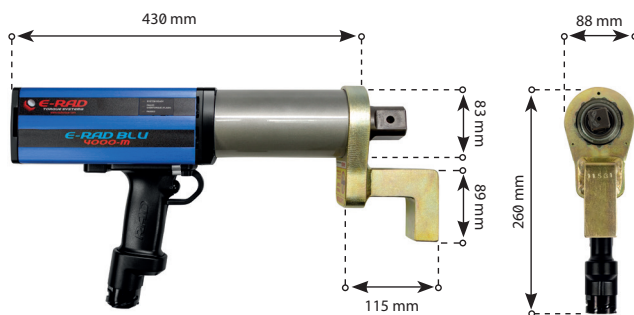

## TOOL KIT INCLUDING

- E-RAD BLU 4000
- Standard reaction arm (PN: 17748)
- Retaining ring (PN: 11350)
- Control box 220V
- Controller cable 4,5 mtr
- Data logging software
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



## ACCESSOIRES

Product	Part number
Smart Socket™ various sizes (option)	On request
E-RAD safety trigger guard (option)	21899
90 degrees handle adapter (option)	23808
Vertical tool hanger (option)	15957
E-RAD BLU 120V (option)	21221
Controller cable 7,6 mtr (option)	21219
Swivelling tool handle (option)	15959

