



140 - 1.400 Nm

MAX SPEED 18 RPM

AUTOMATIC 2-SPEED

TORQUE + ANGLE FUNCTION

AUTO REACTION ARM RELEASE

TORQUE PRESETS

SPECIFICATIONS

- TORQUE RANGE:** 140 - 1.400 Nm.
- SPEED:** 18 RPM.
- WEIGHT:** 5,2 Kg with battery, excluding reaction arm and impact socket.
- SQUARE DRIVE:** ¾ inch square drive.
- BATTERY:** Two 18V Li-ion batteries 5.2Amp/93 Wh.
- NOISE LEVEL:** Maximum 80 dB.
- REPEATABILITY ON SAME JOINT*:** +/- 2%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard



PN: 19260

Deep socket



PN: 13367

Double ended



PN: 13368

Blank



PN: 13364

Double ended blank




PN: 13365

Safety sliding



PN: 25243

DIMENSIONS IN MM

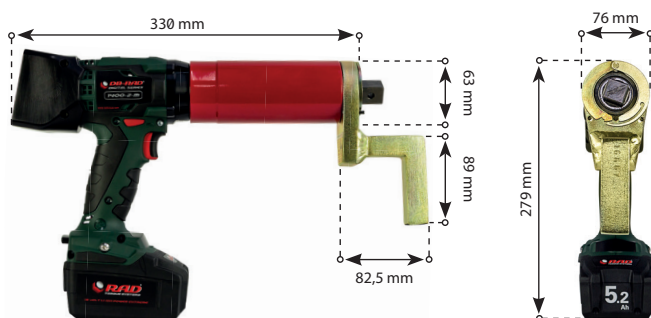

TOOL KIT INCLUDING

- DB-RAD SELECT 1400-2
- Standard reaction arm (PN: 16667)
- Retaining ring (PN: 12733)
- Two batteries with quick charger
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
7.0 Ah LiHD Battery	200321



Non Impacting



Safe & Reliable



Lithium-ion battery



According to European standards



LABORATORY ACCREDITATION BUREAU
ACCREDITED ISO/IEC 17025
Accredited ISO/IEC 17025