



30 - 300 Nm

MAX SPEED 48 RPM

BLUETOOTH CONNECTIVITY

TORQUE + ANGLE LIMITS

DATA LOGGING

TORQUE CHECK FUNCTION

SPECIFICATIONS


- TORQUE RANGE:** 30 - 300 Nm.
- SPEED:** 48 RPM.
- WEIGHT:** 3,5 Kg with battery, excluding reaction arm and impact socket.
- SQUARE DRIVE:** $\frac{3}{4}$ or $\frac{1}{2}$ inch square drive.
- BATTERY:** Two 18V Li-ion batteries 5.2Amp/93 Wh.
- NOISE LEVEL:** Maximum 65 dB.
- TORQUE SETTING:** Steps of 1 Nm.
- REPEATABILITY ON SAME JOINT*:** +/- 2%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 10686	PN: 10687	PN: 10688
Blank	Double ended blank	Safety sliding
		
PN: 10036	PN: 10037	PN: 21243

DIMENSIONS IN MM

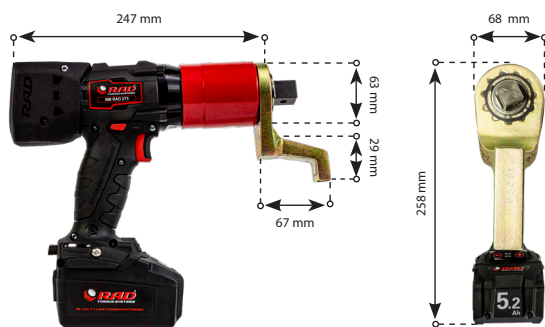

TOOL KIT INCLUDING

- MB-RAD 275
- Standard reaction arm (PN: 10686)
- Retaining ring (PN: 10306)
- Two batteries with quick charger
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
8.0 Ah LiHD battery (126 wh) (option)	200321
Double Safety Trigger (option)	25949

