


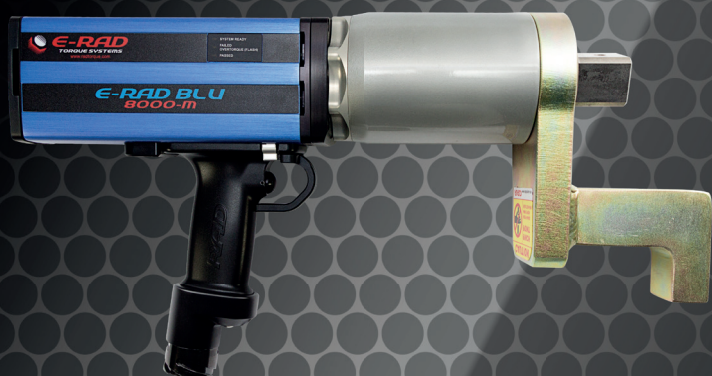

1.385 - 8.100 Nm

MAX SPEED 4 RPM

SERVO CONTROLLED

DATA LOGGING

TORQUE + ANGLE FUNCTION

SMART SOCKET CONNECTIVITY

SPECIFICATIONS

- **TORQUE RANGE:** 1.385 - 8.100 Nm.
- **SPEED:** 4 RPM.
- **WEIGHT:** 13 Kg, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** 1,5 inch square drive.
- **NOISE LEVEL:** Maximum 75 dB.
- **PASSWORD PROTECTION:** Three user levels.
- **LED INDICATOR LIGHTS:** Pass/Fail
- **CUSTOM PROGRAMMABLE**
- **REPEATABILITY ON SAME JOINT*:** +/- 2%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard




PN: 15840

Deep socket



PN: 17643

Double ended



PN: 15790

Blank



PN: 16260

Double ended blank




PN: 15789

Safety sliding



On request

DIMENSIONS IN MM

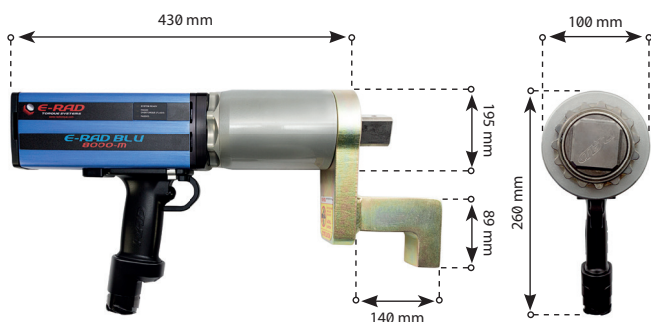

TOOL KIT INCLUDING

- E-RAD BLU 8000
- Standard reaction arm (PN: 15840)
- Retaining ring (PN: 15367)
- Control box 220V
- Controller cable 4,5 mtr
- Data logging software
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
Smart Socket™ various sizes (option)	On request
E-RAD safety trigger guard (option)	21899
90 degrees handle adapter (option)	23808
Vertical tool hanger (option)	20422
E-RAD BLU 120V (option)	21221
Controller cable 7,6 mtr (option)	21219