

2.034 - 10.000 Nm


MAX SPEED 2 RPM

SERVO CONTROLLED

DATA LOGGING

TORQUE PLUS ANGLE

SMART SOCKET CONNECTIVITY

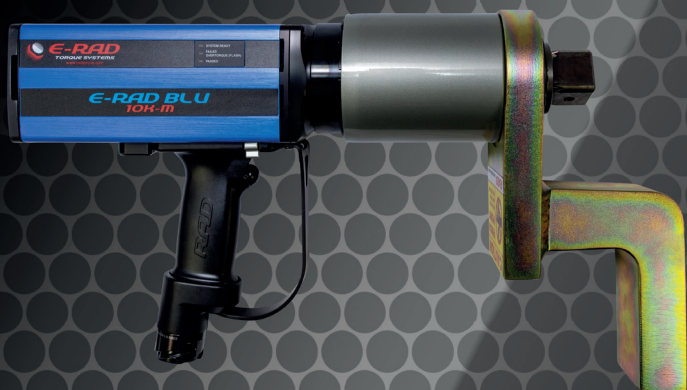


SPECIFICATIONS

- TORQUE RANGE:** 2.034 - 10.000 Nm.
- SPEED:** 2 rpm.
- WEIGHT:** 20,1 Kg, excluding reaction arm and impact socket.
- SQUARE DRIVE:** 1,5 inch square drive.
- NOISE LEVEL:** Maximum 75 dB.
- PASSWORD PROTECTION:** Three user levels.
- LED INDICATOR LIGHTS:** Pass/Fail
- REPEATABILITY ON SAME JOINT*:** +/- 2%.
- * Test results from RAD's certified calibration lab
- CUSTOM PROGRAMMABLE**

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 23144	PN: 13508	PN: 13509
Blank	Double ended blank	Safety sliding
		
PN: 13505	PN: 13506	On request

DIMENSIONS IN MM

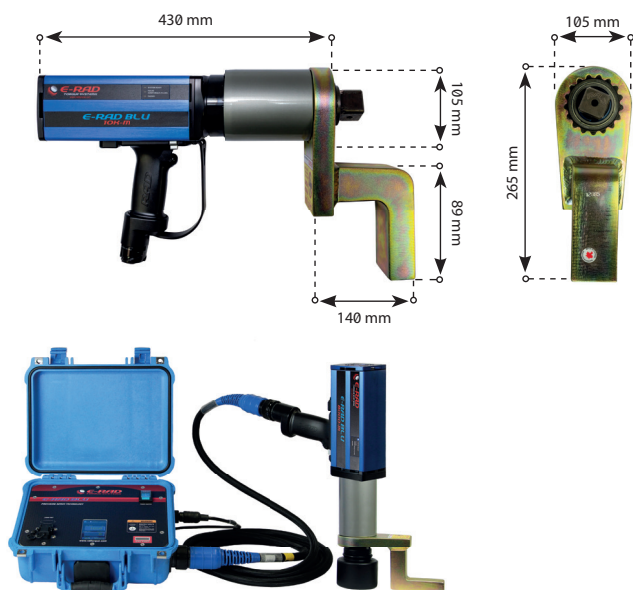

TOOL KIT INCLUDING

- E-RAD BLU 10K
- Standard reaction arm (PN: 23144)
- Retaining ring (PN: 11930)
- Control box 220V
- Controller cable 4,5 mtr
- Data logging software
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
Smart Socket™ various sizes (option)	On request
E-RAD safety trigger guard (option)	21899
90 degrees handle adapter (option)	23808
Vertical tool hanger (option)	24569
E-RAD BLU 120V (option)	21221
Controller cable 7,6 mtr (option)	21219
Swivelling tool handle (option)	22931