



Safety trigger guard

340 - 3.400 Nm

MAX SPEED 11 RPM

SERVO MOTOR

DATA LOGGING

TORQUE + ANGLE FUNCTION

BATCH MODE

OPTION

SPECIFICATIONS


- **TORQUE RANGE:** 340 - 3.400 Nm.
- **SPEED:** 11 RPM.
- **WEIGHT:** 8,3 Kg with battery, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** 1 inch square drive.
- **NOISE LEVEL:** Maximum 75 dB.
- **PASSWORD PROTECTION:** Three user levels.
- **LED INDICATOR LIGHTS:** Pass/Fail.
- **CUSTOM PROGRAMMABLE**
- **REPEATABILITY ON SAME JOINT*:** +/- 2%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 20120	PN: 18251	PN: 10516
Blank	Double ended blank	Safety sliding
		
PN: 10513	PN: 10448	PN: 23472

DIMENSIONS IN MM

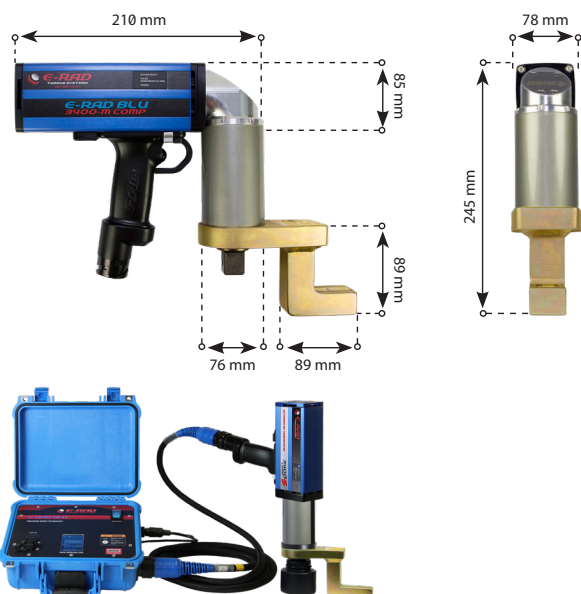

TOOL KIT INCLUDING

- E-RAD BLU 3400-90°
- Standard reaction arm (PN: 20120)
- Retaining ring (PN: 10509)
- Control box 220V
- Controller cable 4,5 mtr
- Data logging software
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
Smart Socket™ various sizes (option)	On request
Swivelling tool handle	15959
E-RAD BLU 120V (option)	21221
Controller cable 7,6 mtr (option)	21219