


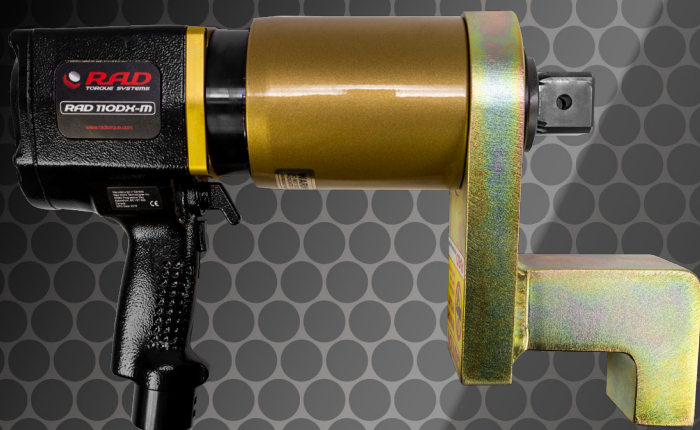

3.400 - 10.800 Nm

MAX SPEED 4 RPM

LIGHTWEIGHT FRL UNIT (2 KG)

HIGH POWER / WEIGHT RATIO

DOUBLE SAFETY TRIGGER
OPTION

SPECIFICATIONS

- TORQUE RANGE:** 3.400 - 10.800 Nm.
- SPEED:** 4 RPM.
- WEIGHT:** 13,8 Kg, excluding reaction arm and impact socket.
- SQUARE DRIVE:** 1,5 inch square drive.
- NOISE LEVEL:** 85 dB.
- REPEATABILITY ON SAME JOINT*:** +/- 2%.

* -Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard



PN: 23114

Deep socket



PN: 13508

Double ended



PN: 13509

Blank



PN: 13505

Double ended blank




PN: 13506

Safety sliding



On request

DIMENSIONS IN MM

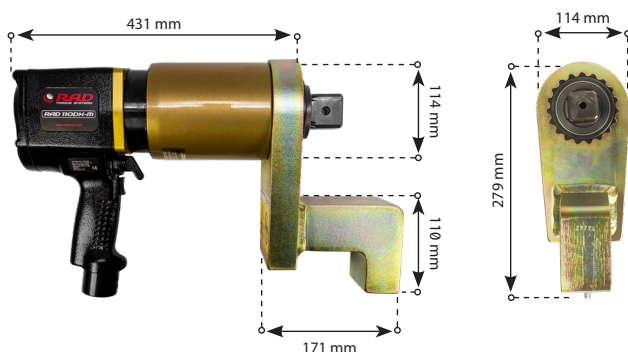

TOOL KIT INCLUDING

- 110 DX
- Standard reaction arm (PN: 23114)
- Retaining ring (PN: 21465)
- Lightweight FRL unit (2 Kg)
- 3.6 meter hose
- Airmotor oil for the FRL unit
- User manual
- Calibration certificate
- Safety instruction on USB stick



ACCESSOIRES

Product	Part number
Double safety trigger (option)	200144
Swivelling tool handle (option)	12931
Tool hanger (option)	24569
Peli cube case (option)	200317
EX certification (option)	200850

