



270 - 2.000 Nm

MAX SPEED 9 RPM

SERVO CONTROLLED

DATA LOGGING

TORQUE + ANGLE FUNCTION

SMART SOCKET CONNECTIVITY

SPECIFICATIONS

- **TORQUE RANGE:** 270 - 2.000 Nm.
- **SPEED:** 9 RPM.
- **WEIGHT:** 5,9 Kg, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** 1 inch square drive.
- **NOISE LEVEL:** Maximum 75 dB.
- **PASSWORD PROTECTION:** Three user levels.
- **LED INDICATOR LIGHTS:** Pass/Fail
- **CUSTOM PROGRAMMABLE**
- **REPEATABILITY ON SAME JOINT*:** +/- 2%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard



PN: 14213

Deep socket



PN: 18480

Double ended



PN: 19094

Blank



PN: 17888

Double ended blank




PN: 19093

Safety sliding



PN: 25242

DIMENSIONS IN MM

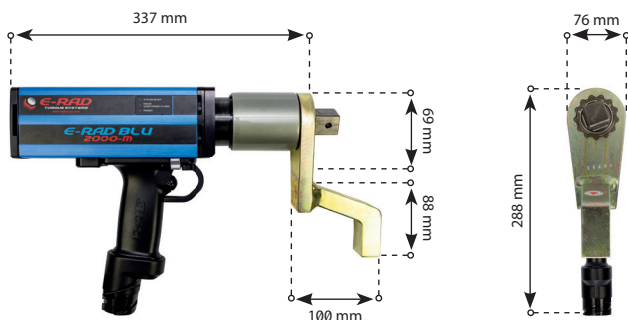

Non Impacting



Safe & Reliable



Bluetooth data exchange



Software managed



Torque + angle function



According to European standards



Accredited ISO/IEC 17025

LABORATORY ACCREDITATION BUREAU
ACCREDITED ISO/IEC 17025
Accredited ISO/IEC 17025

TOOL KIT INCLUDING

- E-RAD BLU 2000
- Standard reaction arm (PN: 14213)
- Retaining ring (PN: 10038)
- Control box 220V
- Controller cable 4,5 mtr
- Data logging software
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
Smart Socket™ various sizes (option)	On request
E-RAD safety trigger guard (option)	21899
90 degrees handle adapter (option)	23808
Vertical tool hanger (option)	On request
E-RAD BLU 120V (option)	21221
Controller cable 7,6 mtr (option)	21219