

4.050 - 15.000 Nm*


MAX SPEED 2 RPM

SERVO CONTROLLED

DATA LOGGING

TORQUE PLUS ANGLE

SMART SOCKET CONNECTIVITY

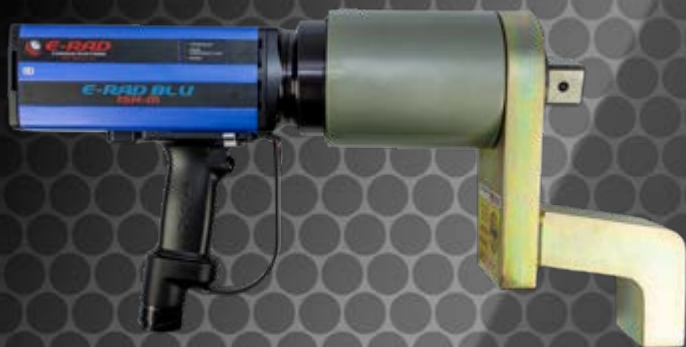


SPECIFICATIONS

- TORQUE RANGE:** 4.050 - 15.000 Nm*.
* 15K Available upon request with 16.500 Nm and 2½" square drive
- SPEED:** 2 RPM.
- WEIGHT:** 20,1 Kg, excluding reaction arm and impact socket.
- SQUARE DRIVE:** 1,5 inch square drive.
- NOISE LEVEL:** Maximum 75 dB.
- PASSWORD PROTECTION:** Three user levels.
- LED INDICATOR LIGHTS:** Pass/Fail.
- REPEATABILITY ON SAME JOINT**:** +/- 2%.
** Test results from RAD's certified calibration lab
- CUSTOM PROGRAMMABLE**

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 23776	On request	PN: 26158
Blank	Double ended blank	Safety sliding
		
PN: 26159	On request	On request

DIMENSIONS IN MM

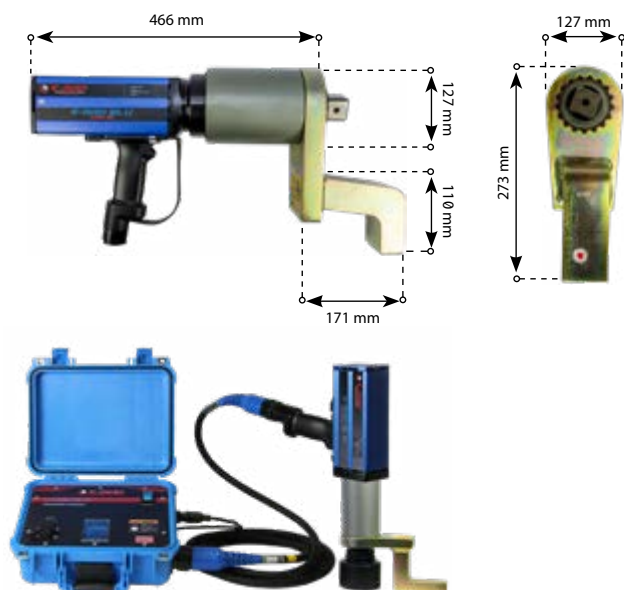

TOOL KIT INCLUDING

- E-RAD BLU 15K
- Standard reaction arm (PN: 23776)
- Retaining ring (PN: 18301)
- Control box 220V
- Controller cable 4,6 mtr
- Data logging software
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
Smart Socket™ various sizes (option)	On request
E-RAD safety trigger guard (option)	21899
90 degrees handle adapter (option)	23808
Vertical tool hanger (option)	24569
E-RAD BLU 120V (option)	21221
Controller cable 7,6 mtr (option)	21219
Swivelling tool handle (option)	22931