



Torque setting adjustable per 10 Nm

140 - 1.400 Nm

MAX SPEED 8 RPM

DIGITAL TORQUE SETTING

EXTREMELY LIGHT WEIGHT

PLUG AND PLAY

SPECIFICATIONS

- **TORQUE RANGE:** 140 - 1.400 Nm.
- **SPEED:** 8 RPM.
- **WEIGHT:** 4 Kg, excluding reaction arm and socket.
- **SQUARE DRIVE:** 3/4 inch square drive.
- **NOISE LEVEL:** Maximum 87 dB.
- **TORQUE SETTING:** 10 Nm incremental or via torque chart in table mode.
- **ACCURACY:** 5% on full scale.

SUITABLE REACTION ARMS

Standard



PN: 13366

Deep socket



PN: 13367

Double ended



PN: 13368

Blank



PN: 13364

Double ended blank




PN: 13365

Safety sliding



PN: 25243

DIMENSIONS IN MM

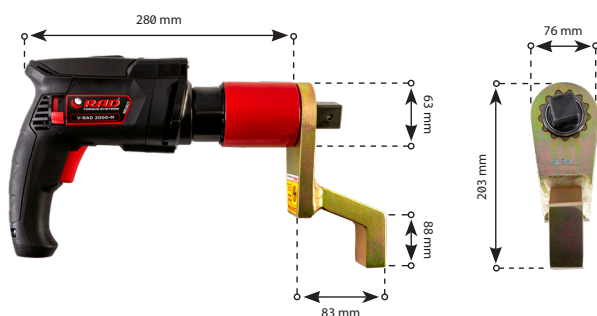

TOOL KIT INCLUDING

- V-RAD SELECT 1400
- Standard reaction arm (PN: 13366)
- Retaining ring (PN: 12733)
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case
- Standard EU Socket



ACCESSOIRES

Product	Part number
Tool hanger (Option)	15960



Non Impacting



Safe & Reliable



According to European standards



LABORATORY
ACCREDITATION
BUREAU
ACCREDITED ISO/IEC 17025
Accredited
ISO/IEC 17025