



Torque setting adjustable per 10 Nm

200 - 2.000 Nm

MAX SPEED 5 RPM

DIGITAL TORQUE SETTING

EXTREMELY LIGHT WEIGHT

PLUG AND PLAY

SPECIFICATIONS

- **TORQUE RANGE:** 200 - 2.000 Nm.
- **SPEED:** 5 RPM.
- **WEIGHT:** 4,3 Kg, excluding reaction arm and socket.
- **SQUARE DRIVE:** 1 inch square drive.
- **NOISE LEVEL:** Maximum 87 dB.
- **TORQUE SETTING:** 10 Nm incremental via torque chart in table mode.
- **ACCURACY:** 5% on full scale.

SUITABLE REACTION ARMS

Standard



PN: 14213

Deep socket



PN: 18480

Double ended



PN: 19094

Blank



PN: 17888

Double ended blank




PN: 19093

Safety sliding



PN: 25242

DIMENSIONS IN MM

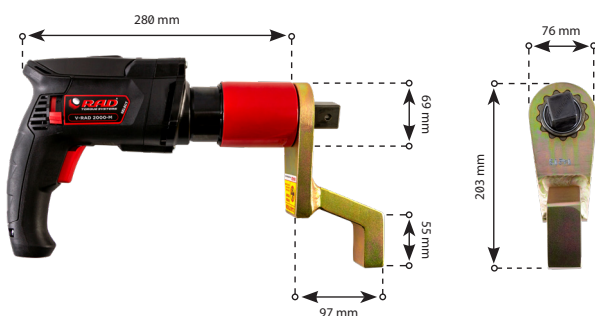

TOOL KIT INCLUDING

- V-RAD SELECT 2000
- Standard reaction arm (PN: 14213)
- Retaining ring (PN: 17367)
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case
- Standard EU Socket



ACCESSOIRES

Product	Part number
Tool handle/hanger two eyes	21059



Non Impacting



Safe & Reliable



According to European standards



LABORATORY
ACCREDITATION
BUREAU
ACCREDITED ISO/IEC 17025
Accredited
ISO/IEC 17025