



**Safety hand guard**

**2.000 - 7.000 Nm**

**MAX SPEED 8 RPM**

**LIGHTWEIGHT FRL UNIT (2 KG)**

**HIGH POWER / WEIGHT RATIO**

**DOUBLE SAFETY TRIGGER**  
OPTION


## SPECIFICATIONS

- **TORQUE RANGE:** 2.000 - 7.000 Nm.
  - **SPEED:** 8 RPM.
  - **WEIGHT:** 10,7 Kg, excluding reaction arm and impact socket.
  - **SQUARE DRIVE:** 1,5 inch square drive.
  - **NOISE LEVEL:** 85 dB.
  - **REPEATABILITY ON SAME JOINT\*:** +/- 2%.
- \* -Test results from RAD's certified calibration lab

## SUITABLE REACTION ARMS

| Standard  | Deep socket        | Double ended   |
|-----------|--------------------|----------------|
|           |                    |                |
| PN: 25286 | PN: 26118          | PN: 26119      |
| Blank     | Double ended blank | Safety sliding |
|           |                    |                |
| PN: 26120 | PN: 26121          | On request     |

## DIMENSIONS IN MM

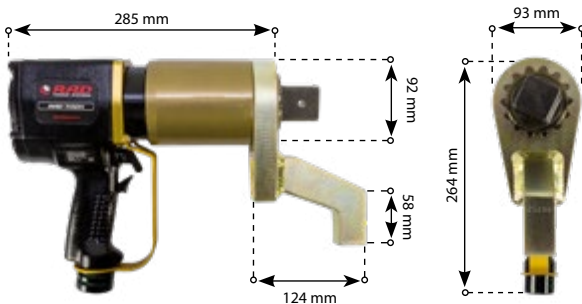

## TOOL KIT INCLUDING

- 70 DX
- Standard reaction arm (PN: 25286)
- Retaining ring (PN: 10032)
- Lightweight FRL unit (2 Kg)
- 3.6 meter hose
- Airmotor oil for the FRL unit
- User manual
- Calibration certificate
- Safety instruction on USB stick



## ACCESSOIRES

| Product                         | Part number |
|---------------------------------|-------------|
| Double safety trigger (option)  | 200144      |
| Swivelling tool handle (option) | On request  |
| Tool hanger (option)            | On request  |
| Peli cube case (option)         | 200317      |
| EX certification (option)       | 200850      |