



Torque setting adjustable per 10 Nm



400 - 2.000 Nm

MAX SPEED 19 RPM

AUTOMATIC 2-SPEED

AUTO REACTION ARM BACK OFF

BRUSHLESS MOTOR

DOUBLE SAFETY TRIGGER
OPTION

SPECIFICATIONS

- TORQUE RANGE:** 400 - 2.000 Nm.
- SPEED:** Automatic gearbox with 19 RPM.
- WEIGHT:** 4,9 Kg with battery, excluding reaction arm and impact socket.
- SQUARE DRIVE:** 1 inch square drive.
- BATTERY:** Two 18V Li-ion batteries 5.2 Amp/93 Wh.
- NOISE LEVEL:** Maximum 65 dB.
- TORQUE SETTING:** Steps of 10 Nm or ft. lbs
- REPEATABILITY ON SAME JOINT*:** +/- 3%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard



PN: 14213

Deep socket



PN: 18480

Double ended



PN: 19094

Blank



PN: 17888

Double ended blank




PN: 19093

Safety sliding



PN: 25242

DIMENSIONS IN MM

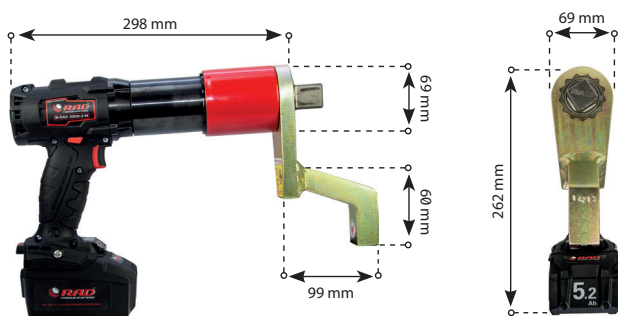

TOOL KIT INCLUDING

- B-RAD SELECT BL 2000-2
- Standard reaction arm (PN: 14213)
- Retaining ring (PN: 17367)
- Two batteries with quick charger
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
8.0 Ah LiHD battery (144 wh) (option)	200473
Double Safety Trigger (option)	25949
Nose extension - 349 mm (option)	18185



Non Impacting



Safe & Reliable



Lithium-ion battery



According to European standards



Accredited ISO/IEC 17025