



Torque setting adjustable per 10 Nm

800 - 4.000 Nm

MAX SPEED 19 RPM

AUTOMATIC 2-SPEED

AUTO REACTION ARM BACK OFF

BRUSHLESS MOTOR

DOUBLE SAFETY TRIGGER

OPTION

SPECIFICATIONS

- GEARBOX:** Torque range of 800 - 4.000 Nm.
- SPEED:** Automatic gearbox with 19 RPM.
- WEIGHT:** 6,7 Kg with battery, excluding reaction arm and impact socket.
- SQUARE DRIVE:** 1 inch square drive (replaceable).
- BATTERY:** Two 18V Li-ion batteries 5.2 Amp/93 Wh.
- NOISE LEVEL:** Maximum 65 dB.
- TORQUE SETTING:** Steps of 10 Nm or ft. lbs
- REPEATABILITY ON SAME JOINT*:** +/- 3%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard



PN: 27022

Deep socket



PN: 24814

Double ended



PN: 25437

Blank



PN: 24813

Double ended blank




PN: 25016

Safety sliding



PN: 26922

DIMENSIONS IN MM

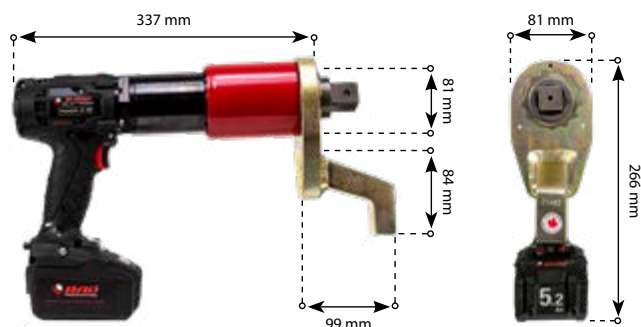

TOOL KIT INCLUDING

- B-RAD SELECT BL 4000-2
- Standard reaction arm (PN: 21482)
- Retaining ring (PN: 17367)
- Two batteries with quick charger
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
8.0 Ah LiHD battery (144 wh) (option)	200473
Double Safety Trigger (option)	25949
Replaceable square drive	11363



Non Impacting



Safe & Reliable



Lithium-ion battery



According to European standards



Accredited ISO/IEC 17025