



Torque setting adjustable per 10 Nm



50 - 270 Nm

MAX SPEED 47 RPM

DIGITAL TORQUE SETTING

FAST AND LIGHT

DOUBLE SAFETY BUTTON

OPTION

SPECIFICATIONS


- TORQUE RANGE:** 50 - 270 Nm.
- SPEED:** 47 RPM.
- WEIGHT:** 3,2 Kg with battery, excluding reaction arm and impact socket.
- SQUARE DRIVE:** ¾ or ½ inch square drive.
- BATTERY:** Two 18V Li-ion batteries 5.2Amp/93 Wh.
- NOISE LEVEL:** Maximum 65 dB.
- REPEATABILITY ON SAME JOINT*:** +/- 3%.

*Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 10686	PN: 10687	PN: 10688
Blank	Double ended blank	Safety sliding
		
PN: 10036	PN: 13365	PN: 21243

DIMENSIONS IN MM

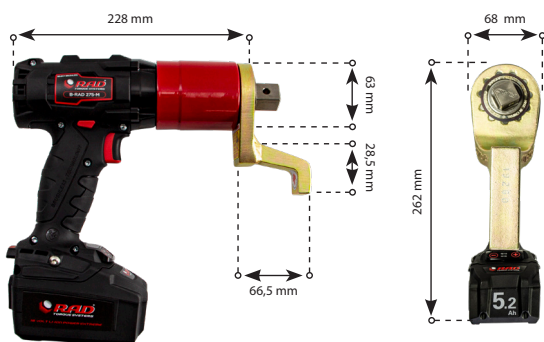

TOOL KIT INCLUDING

- B-RAD SELECT Brushless 275
- Standard reaction arm (PN: 10686)
- Retaining ring (PN: 10306)
- Two batteries with quick charger
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
8.0 Ah LiHD battery (126 wh) (option)	200321
Double Safety Trigger (option)	25949

