



**300 - 1.400 Nm**

**MAX SPEED 71 RPM**

**AUTO REACTION ARM BACK OFF**

**BRUSHLESS MOTOR**

**DOUBLE SAFETY TRIGGER**

**OPTION**

## SPECIFICATIONS


- **TORQUE RANGE:** 300 - 1.400 Nm.
- **SPEED:** 71 RPM.
- **WEIGHT:** 4,8 Kg with battery, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** ¾ inch square drive.
- **BATTERY:** Two 18V Li-ion batteries 5.2Amp/93 Wh.
- **NOISE LEVEL:** Maximum 65 dB.
- **REPEATABILITY ON SAME JOINT\*:** +/- 3%.

\*Test results from RAD's certified calibration lab

## SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
PN: 13366	PN: 13367	PN: 13368
Blank	Double ended blank	Safety sliding
PN: 13364	PN: 13365	PN: 25243

## DIMENSIONS IN MM

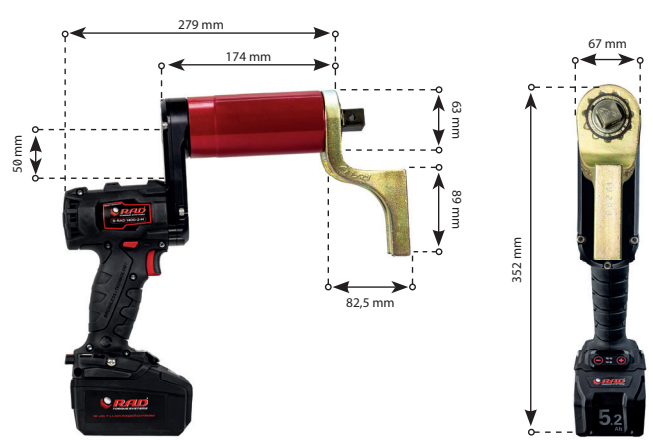

## TOOL KIT INCLUDING

- B-RAD Offset 1400-2
- Standard reaction arm (PN: 13366)
- Retaining ring (PN: 12733)
- Two batteries with quick charger
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



## ACCESSOIRES

Product	Part number
8,0 Ah LiHD battery (144 wh) (option)	200473
Double Safety Trigger (option)	25949

