



Torque setting adjustable per 10 Nm



- 800 - 4.000 Nm**
- MAX SPEED 19 RPM**
- AUTOMATIC 2-SPEED**
- AUTO REACTION ARM BACK OFF**
- BRUSHLESS MOTOR**
- DOUBLE SAFETY TRIGGER**
OPTION

SPECIFICATIONS


- **GEARBOX:** Torque range of 800 - 4.000 Nm.
- **SPEED:** Automatic gearbox with 19 RPM.
- **WEIGHT:** 7,3 Kg with battery, excluding reaction arm and impact socket.
- **SQUARE DRIVE:** 1 inch square drive (replaceable).
- **BATTERY:** Two 18V Li-ion batteries 5.2 Amp/93 Wh.
- **NOISE LEVEL:** Maximum 65 dB.
- **TORQUE SETTING:** Steps of 10 Nm or ft. lbs
- **REPEATABILITY ON SAME JOINT*:** +/- 3%.

* Test results from RAD's certified calibration lab

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
PN: 27022	PN: 24814	PN: 25437
Blank	Double ended blank	Safety sliding
PN: 24813	PN: 25016	PN: 26922

DIMENSIONS IN MM

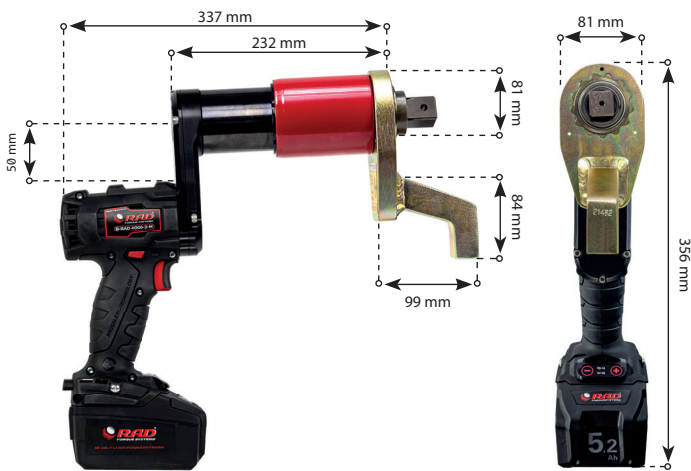

TOOL KIT INCLUDING

- B-RAD Offset 4000-2
- Standard reaction arm (PN: 21482)
- Retaining ring (PN: 17367)
- Two batteries with quick charger
- Calibration certificate
- Usermanual
- Safety instructions on USB stick
- Weatherproof storage case



ACCESSOIRES

Product	Part number
8,0 Ah LiHD battery (144 wh) (option)	200473
Double Safety Trigger (option)	25949
Replaceable square drive	11363

